




GSM Plug-in with Data Plan

For Europe and Israel

SE1000-GSM02-B

SE-SIM-R12-EU-S1 / SE-SIM-R12-EU-S2

SE-SIM-R05-EU-S5 / SE-SIM-R05-EU-S3

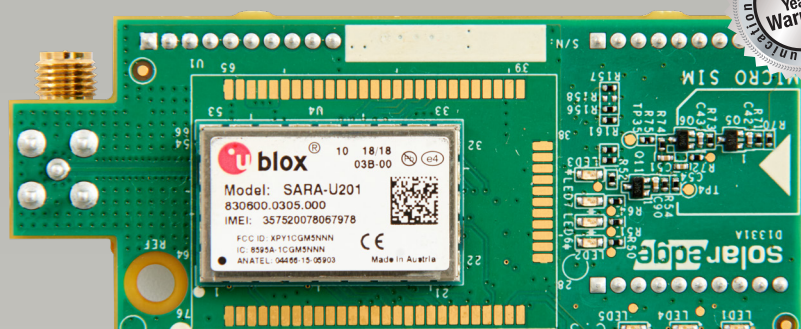

COMMUNICATION

Cellular Internet Connectivity

- Compatible with inverters with SetApp configuration
- Connects SolarEdge inverters wirelessly to the Internet
- No need for Internet infrastructure at site
- Installed within the inverter enclosure for outdoor resilience
- Enables remote analysis and troubleshooting
- Supports low bandwidth configuration for reduced data usage and cost
- Can be used with SolarEdge data plan or third-party SIM card

* For a detailed coverage map refer to the following link and select the 3G GSM option: <http://www.aeris.com/technology/aerconnect/coverage-map/#modal>



GSM Plug-in with Data Plan

For Europe and Israel

SE1000-GSM02-B

SE-SIM-R12-EU-S1 / SE-SIM-R12-EU-S2

SE-SIM-R05-EU-S5 / SE-SIM-R05-EU-S3

COMPATIBLE INVERTERS	SEXXXX-XXXXXBXX4 (INVERTERS WITH SETAPP CONFIGURATION)		UNIT
	High Bandwidth Mode	Low Bandwidth Mode	
DATA PLAN			
Number of Inverters Monitored with a Single GSM Plug-in	Up to 32	1	
Monitoring	Data sampled every 5 minutes and sent to SolarEdge server continuously*	Data sampled every 15 minutes and sent to SolarEdge server every 4 hours	
Monthly Data - per Inverter	7.8	2.6	MB
Monthly Data - per Optimizer	0.15	0.05	MB
Monthly Data - per Revenue Grade Meter	0.3	0.1	MB
Monthly Data - per Export or Consumption Meter	3	0.55	MB
Monthly Data - per Battery	3	0.7	MB
Monthly data - per Commercial Gateway or Firefighter Gateway	3	Not supported	MB
Compatible with 3 rd party SIM card		✓	
Compatible with SolarEdge data plan		✓ (see table below)	
RF PERFORMANCE			
Operating Frequency Min.-Max. 900	Modem transmit: 880-915 / Modem receive: 925-960		MHz
Operating Frequency Min.-Max. 1800	Modem transmit: 1710-1785 / Modem receive: 1805-1880		MHz
Operating Frequency Min.-Max. 2100	Modem transmit: 1920 -1980 / Modem receive: 2110 -2170		MHz
Antenna	Included, 2dBi outdoor; Dual band antenna: 824-960MHz / 1710-2170MHz		
Maximum output power: 0.9GHz / 1.8GHz / 2.1GHz band	33 / 30 / 24		dBm
Receiver Input Sensitivity (Downlink RF level @ BER Class II < 2.4 %)	Typical -109		dBm
STANDARD COMPLIANCE			
Emissions and Radio	EN 301-489-1, EN 301-489-7, EN 301-511		
INSTALLATION SPECIFICATIONS			
Dimensions (L x W)	90.5 x 34.5 / 3.55 x 1.35		mm/in
Operating Temperature	-40 to +85 / -40 to +185		°C/°F
Mounting	Built into the inverter or purchased separately		
SIM CARD HOLDER			
Type	Micro-Sim**		

* Up to 90MB/month of overhead per site may be observed, depending on SIM card provider

** Non-SolarEdge SIM cards must be 3G GSM compatible. If the SIM is intended for use in Low Bandwidth mode it must have SMS capabilities


SolarEdge Data Plans for Low Bandwidth Mode		
	SE-SIM-R12-EU-S1	SE-SIM-R12-EU-S2
Supported Systems	Residential systems: one inverter, up to 60 power optimizers, and 2 meters	Residential StorEdge systems: one inverter, up to 60 power optimizers, up to two batteries, and 2 meters
Monitoring	Data sampled every 15 minutes and sent to SolarEdge server every 4 hours (Low Bandwidth Mode)	
Number of Monitored Inverters with a Single GSM Plug-in	1	
Plan Duration	12 year prepaid plan	

SolarEdge Data plans for High Bandwidth Mode		
	SE-SIM-R05-EU-S5	SE-SIM-R05-EU-S3
Supported Systems	Commercial systems up to 100kW DC	Commercial systems up to 250kW DC
Monitoring	Continuous connection with 5 minute telemetry from all connected devices	
Number of Monitored Inverters with a Single GSM Plug-in	Up to 32, limited by the system DC size	
Plan Duration	5 year prepaid plan	

GSM Plug-in Offering

	GSM Plug-in Inverter	GSM Plug-in Plug-in	Data Plan
Description	Inverter with built-in GSM Plug-in	Plug-in	SIM card with data plan
Supported Systems	Single and three phase inverters	Single and three phase inverters with part number SEXXXX-XXXXXBXX4	Residential and StorEdge systems
Data Plan	Data plan purchased separately	Data plan purchased separately	Data sampled every 15 minutes and uploaded every 4 hours
Part Number		SE1000-GSM02-B	SE-SIM-R12-EU-S1 (residential) / SE-SIM-R12-EU-S2 (StorEdge)

High Bandwidth Mode

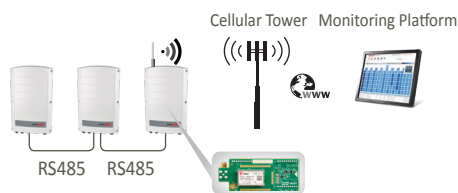

Low Bandwidth Mode

