

**SUNNY
HIGHPOWER
PEAK3**

SMA UTILITY SOLUTIONS

Customized for tomorrow, today.

ennexOS ready



A superior, modular 1,500 VDC solution
for utility power plants



**SUNNY
HIGHPOWER
PEAK3**

Get large-scale projects up and running easily.



1500 V_{DC}, 150 kW, compact design

PEAK3 stands for pure power. With its compact design, the inverter offers the highest power density per device. The advantages: optimal performance at a light weight. The result is cheaper transportation and easier installation. In combination with the project-specific DC Combiner Boxes, the PV array can be oversized up to 150%. The Data Manager completes the system and enables it to fulfill all of the grid operator's requirements.

Maximum safety & reliability

The PEAK3 inverter focuses on what is most important – maximum yield and optimal plant availability. All features and components are custom-tailored in order to keep the weight down, to minimize potential error sources and to maximize efficiency. Proven technologies such as the active cooling system SMA OptiCool™ ensure a long lifetime of the inverters.

Flexible, easily scalable plant design

The PEAK3 system solution combines the advantages of a decentralized system layout with those of the central inverter concept. The DC Combiner Boxes enable efficient planning and easy expansion of large-scale solar plants even on heterogeneous terrain. Thanks to the modular approach, projects can be scaled both in terms of power and function. This means maximum flexibility in the plant design.

Ready for the digital energy world of tomorrow

The PEAK3 system solution is ready for ennexOS, SMA's pioneering digital platform. ennexOS converges the data of all relevant energy sectors to realize modern, forward-looking products in the energy industry. The platform is gradually extended and currently offers powerful features such as satellite-based performance ratio monitoring. Further information: www.ennexos.com



PEAK3 Solution with Inverter,
DC Combiner Boxes and Data Manager



PEAK3 – the first distributed solution, specially developed for PV power plants.

Fast installation, easy commissioning

The PEAK3 system solution offers smart functionalities for quick and safe installation of all devices. Ergonomic grips and the integrated hook-in mechanism simplify the mounting of the inverters. Large, stiff DC cables can be conveniently routed via a separable connection plate and allow hassle-free connection. A single Data Manager enables up to 200 inverters to be commissioned centrally in just a few minutes.

Efficient control, convenient monitoring

Each device can be controlled directly via reliable, fast Ethernet communication between Data Manager and inverter. The entire plant portfolio can be centrally monitored with the new Sunny Portal powered by ennexOS. Changes to the configuration are easily made across plants without setting up multiple VPN connections. Additional monitoring systems can access all devices via the open Modbus/TCP interface.

**SUNNY
HIGHPOWER
PEAK3**

Modular system of high performance extensions.

The future-proof solution that grows with your requirements

More than 20 years of utility experience have gone into the development of the PEAK3 system solution. Central handling, decentralized system and a modular concept – that's exactly what makes PEAK3 so convincing. The powerful supplements help you get the most out of large PV plants.



PEAK3 extensions: SMA Engineering Services, Smart Connected for Utility Plants, Weather Station and Remote I/O

Tailored to your unique needs



PEAK3 – meets the highest demands for maximum yield.



SMA ENGINEERING SERVICES

- Comprehensive consulting by technical experts from early project stages
- Static generator evaluation including load flow and short-circuit analysis
- Optimization of plant behavior in systems

(☉) SMART CONNECTED FOR UTILITY PLANTS

- Free and automatic inverter monitoring by SMA
- Proactive communication by e-mail in the event of faults
- Lower lifecycle service costs – no on-site diagnosis needed



ADDITIONAL PRODUCTS

- **Weather Station:** Professional measuring equipment for synchronous logging of temperature, relative humidity and irradiance
- **Remote I/O:** The preconfigured I/O systems are perfectly coordinated with ennexOS and can be easily integrated into a system


SUNNY HIGHPOWER PEAK3

Customized for tomorrow, today.

Decentralized solution with up to 150 kW for large-scale PV power plants

Thanks to an intelligent system structure, all inverters and the Data Manager are installed centrally. The DC Combiner Boxes are distributed in the field. The result: maximum performance, improved installation and maintenance, cost-optimized cabling.

System diagram

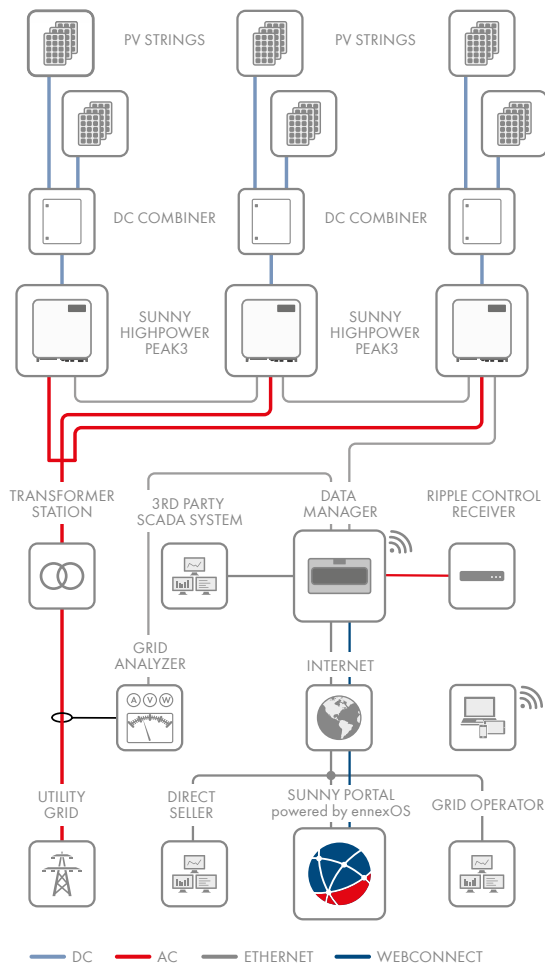

ennexOS ready



SUNNY HIGHPOWER PEAK3 – Technical Data

Technical Data	Sunny Highpower 100-20	Sunny Highpower 150-20
Input (DC)		
Max. PV array power	150000 Wp	225000 Wp
Max. input voltage	1000 V	1500 V
MPP voltage range / rated input voltage	590 V to 1000 V / 590 V	880 V to 1450 V / 880 V
Max. input current / max. short-circuit current	180 A / 325 A	180 A / 325 A
Number of independent MPP trackers	1	1
Number of inputs	1 or 2 (optional) for external PV array junction boxes	
Output (AC)		
Rated power at nominal voltage	100000 W	150000 W
Max. apparent power	100000 VA	150000 VA
Nominal AC voltage / AC voltage range	400 V / 304 V to 477 V	600 V / 480 V to 690 V
AC grid frequency / range	50 Hz / 44 Hz to 55 Hz 60 Hz / 54 Hz to 66 Hz	50 Hz / 44 Hz to 55 Hz 60 Hz / 54 Hz to 66 Hz
Rated grid frequency	50 Hz	50 Hz
Max. output current	151 A	151 A
Power factor at rated power / displacement power factor adjustable	1 / 0 overexcited to 0 underexcited	
Harmonic (THD)	< 3%	< 3%
Feed-in phases / AC connection	3 / 3-PE	3 / 3-PE
Efficiency		
Max. efficiency / European efficiency	98.8% / 98.6%	99.1% / 98.8%
Protective devices		
Ground fault monitoring / grid monitoring / DC reverse polarity protection	● / ● / ●	● / ● / ●
AC short-circuit current capability / galvanically isolated	● / –	● / –
All-pole-sensitive residual-current monitoring unit	●	●
Monitored surge arrester (type II) AC / DC	● / ●	● / ●
Protection class (according to IEC 62109-1) / overvoltage category (as per IEC 62109-1)	I / AC: III; DC: II	I / AC: III; DC: II
General Data		
Dimensions (W / H / D)	770 mm / 830 mm / 444 mm (30.3 in / 32.7 in / 17.5 in)	
Weight	98 kg (216 lbs)	
Operating temperature range	-25°C to +60°C (-13°F to +140°F)	
Noise emission (typical)	< 65 dB(A)	
Self-consumption (at night)	< 5 W	
Topology	transformerless	
Cooling method	OptiCool, active cooling, speed-controlled fan	
Degree of protection (according to IEC 60529)	IP65	
Max. permissible value for relative humidity (non-condensing)	100%	
Features / function / accessories		
DC connection / AC connection	Terminal lug (up to 300 mm ²) / Screw terminal (up to 150 mm ²)	
LED display (Status / Fault / Communication)	●	
Ethernet interface	● (2 ports)	
Data interface: SMA Modbus / SunSpec Modbus / Speedwire, Webconnect	● / ● / ●	
Mounting type	Rack mounting	
OptiTrac Global Peak / Integrated Plant Control / Q on Demand 24/7	● / ● / ●	
Off-grid capable / SMA Fuel Save Controller compatible	● / ●	
Warranty: 5 / 10 / 15 / 20 years	● / ○ / ○ / ○	
Certificates and approvals (planned)	IEC 62109-1/-2, AR N-4110, AR N-4120, CEI 0-16, C10/11:2012, EN 50549, PEA 2017, DEWA	
Type designation	SHP 100-20	SHP 150-20

● Standard features ○ Optional features – Not available Data at nominal conditions Status: 1/2019





ENERGY
THAT
CHANGES

