



**M8-TP08**

Series	AGM-S	Warranty	See Warranty Terms
Volts	12	BCI	Grp 31
Cells	6		
Terminal Type	M8-TP08		
Included Hardware	Stainless Steel Nuts & Bolts		
Size & Thread	M8-TP8		

### Charge

Charge Voltage Range	14.5-14.9 V/cell @ 25°C (77°F)
Float Voltage Range	13.6-13.8 V/cell @ 25°C (77°F)
Recommended Charge Current Capacity (String)	25 A
Maximum Charge Current (String)	35 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	5 mΩ

### Capacity

Cold Crank Amps (CCA) 0°F / -17°C	800
Marine Crank Amps (MCA) 32°F / 0°C	1000
Reserve Capacity (RC @ 25A)	220 Minutes
Reserve Capacity (RC @ 75A)	70 Minutes
Capacity Affect by Temperature	40°C (104°F)    25°C (77°F)    0°C (32°F)    -15°C (5°F)
	102%    100%    85%    65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>128 AH</b>	<b>1.28 A</b>
@ 20 Hour Rate	<b>115 AH</b>	<b>5.75 A</b>
@ 10 Hour Rate	<b>105 AH</b>	<b>10.5 A</b>
@ 5 Hour Rate	<b>97 AH</b>	<b>19.3 A</b>

### Cut Off Voltage      Constant Current Discharge

VPC	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
	62.1	33	27	18.2	11.9	10.5

### Specifications




SAI GLOBAL  
ISO 9001  
Quality

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Weight	32 kg	70.5 lbs
Length	32.8 cm	12.91"
Width	17.5 cm	6.89"
Height Inc. Term.	23.7 cm	9.33"
Container	ABS	
Cover	ABS	
Handles	Nylon Strap	

### Cycle Life vs. Depth of Discharge

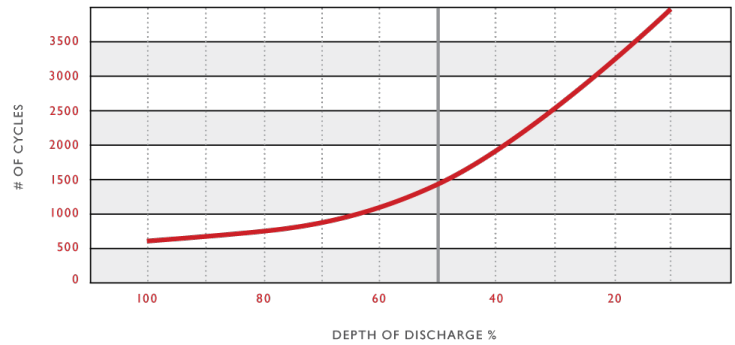

### Capacity vs. Temperature

