

PS600 HR-03

Solar Submersible Pump System for 4" wells

System Overview

| | |
|-----------|----------------|
| Head | max. 120 m |
| Flow rate | max. 0.45 m³/h |

Technical Data

Controller PS600

- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)
- Battery operation: Integrated low voltage disconnect

| | |
|-------------------------------------|--------------|
| Power | max. 0.70 kW |
| Input voltage | max. 150 V |
| Optimum Vmp* | > 68 V |
| Nominal voltage (battery operation) | 48 V |
| Motor current | max. 13 A |
| Efficiency | max. 98 % |
| Ambient temp. | -30...50 °C |
| Enclosure class | IP54 |

Motor ECDRIVE 600-HR

- Maintenance-free brushless DC motor
- Water filled
- Premium materials, stainless steel: AISI 304/316
- No electronics in the motor

| | |
|------------------|----------------|
| Rated power | 0.70 kW |
| Efficiency | max. 92 % |
| Motor speed | 900...3300 rpm |
| Insulation class | F |
| Enclosure class | IP68 |
| Submersion | max. 250 m |

Pump End PE HR-03**

- Non-return valve
- Premium materials, stainless steel: AISI 304/316

Pump Unit PU HR-03 (Motor, Pump End)

| | |
|-------------------|-------------|
| Borehole diameter | min. 4,0 in |
| Water temperature | max. 50 °C |

Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995,
IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

**Specify temperature range on order




PS600 HR-03

Solar Submersible Pump System for 4" wells

Pump Chart


Vmp* > 68 V

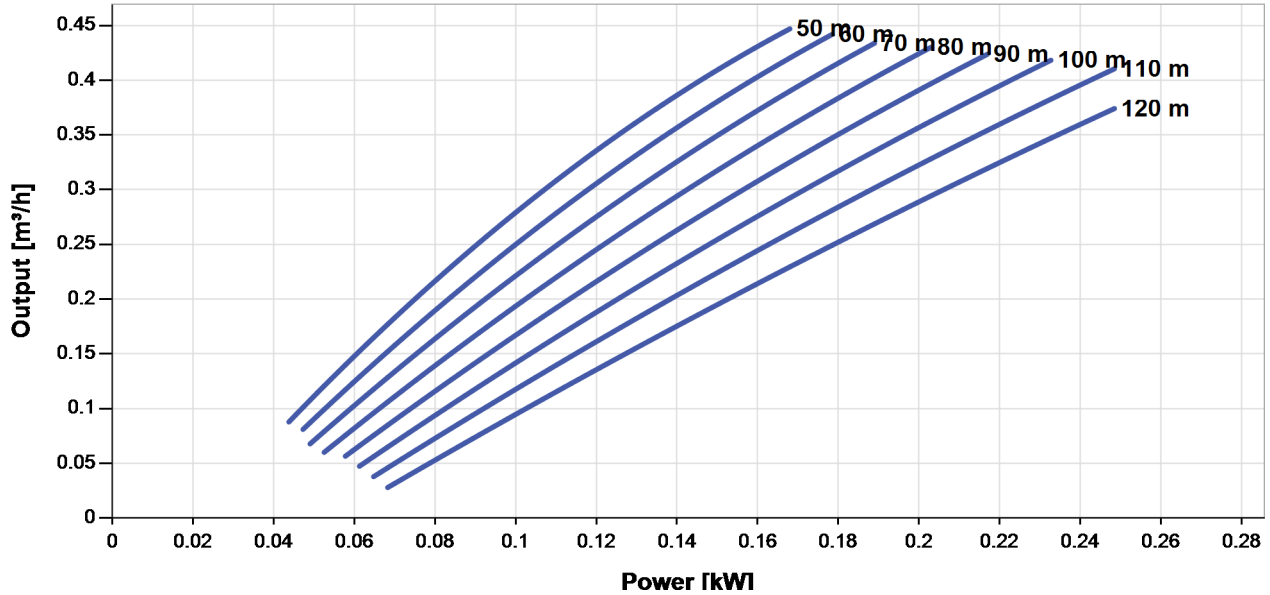

Dimensions and Weights


Controller

- H = 396 mm
- H2 = 364 mm
- W1 = 178 mm
- W2 = 156 mm
- W3 = 116 mm
- D = 165 mm
- D1 = 150 mm

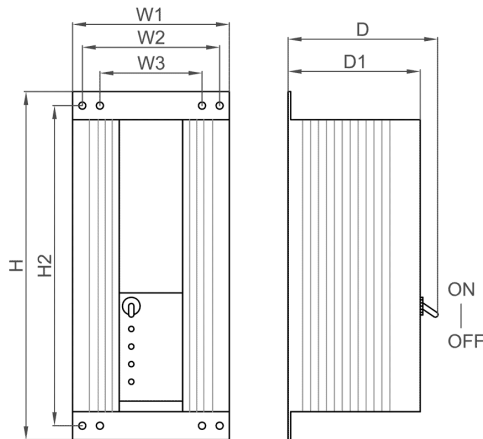

Pump Unit

- A = 780 mm
- B = 185 mm
- C = 595 mm
- D = 96 mm
- S = 1.25 in

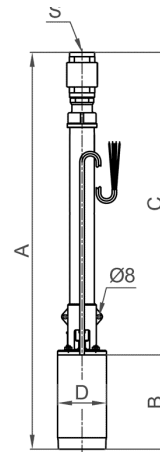

| | Net weight |
|------------|------------|
| Controller | 4.5 kg |
| Pump Unit | 11 kg |
| Motor | 7.0 kg |
| Pump End | 4.2 kg |

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

BERNT LORENTZ GmbH & Co. KG
 Kroegerskoppel 7, 24558 Henstedt-Ulzburg, Germany,
 Tel +49 (0)4193 7548-0, Fax -29, www.lorentz.de



Created by LORENTZ COMPASS 3.0.10.9

All specifications and information are given with good intent, errors are possible and products may be subject to change without notice. Pictures may differ from actual products depending on local market requirements and regulations.