

Product offering



HelioFuse ATM - 600VDC




Minimum Breaking Capacity = 1.35In ; Maximum Breaking Capacity = 100kA			
Max. Operating Voltage = Rated Voltage	Rated Current	Cat. Number	Packaging
600VDC UL/CSA @ L/R = 10ms	5	ATM5	10
	8	ATM8	10
	10	ATM10	10
	15	ATM15	10
	20	ATM20	10
	25	ATM25	10
	30	ATM30	10
	5	PCF5-H	10
	8	PCF8-H	10
	10	PCF10-H	10
	15	PCF15-H	10
	20	PCF20-H	10
	25	PCF25-H	10
	30	PCF30-H	10

For UL fuses, the maximum operating voltage is equal to the rated voltage. Other ratings are available (consult us).

Electrical characteristics


Cat. Number	Watt Losses @ 0.7In & 20°C
ATM5	0.6
ATM8	0.7
ATM10	0.75
ATM15	0.8
ATM20	1
ATM25	1.1
ATM30	1.2

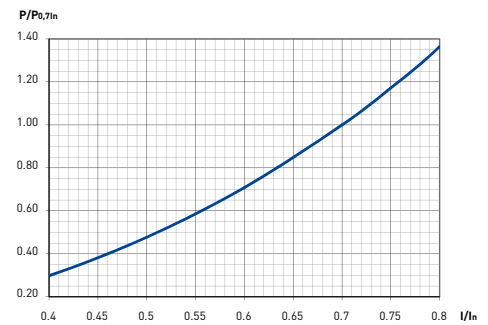

Fuse holders


Nb of pole	Cat. Number	Ref. Number	Nb of Mode (17.5mm)	Pack	Indicator
1	US101HEL	D1009979K	1	12	Without Ind.
1	US101HEL	Q1009461K	1	12	With Ind.

Corrective factor for power losses vs. ambient temperature

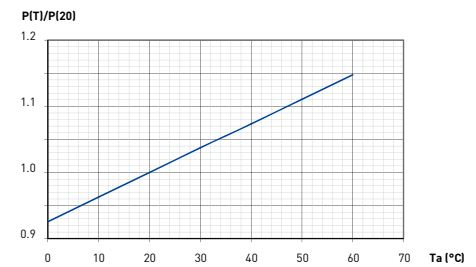

Drawing

ATM

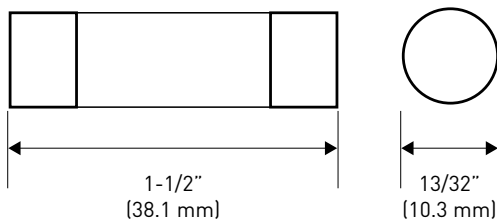

PCF Double Hole Mount (Round Holes)

