



31HT120 4000 Series

Rolls 12V 120Ah (C20) Deep Cycle Battery






RESERVE CAPACITY		CCA	
@25AMPS		MCA@0°C	CCA@-18°C
235 Mins.		572	457

SPECIFICATIONS			
Nominal Voltage		12 Volt	
Rated Capacity (20 hour rate)		120Ah	
Dimensions	Height	238mm	
	Length	330mm	
	Width	171mm	
Weight		21 Kg	

PLATES	
Cells	6
Plates/Cell	12
Plate Height	140mm
Plate Width	143mm
Positive Thickness	3.43mm
Negative Thickness	2.24mm
Separator Thickness	1mm
Insulation Glass Mat	1mm

CHARACTERISTICS		
Capacity 77°F (25°C)	100 Hour Rate	166 Ah
	20 Hour Rate	120 Ah
	10 Hour Rate	101 Ah
Current (Amps)	100 Hour Rate	1.66
	20 Hour Rate	6.3
	10 Hour Rate	10.9
Electrolyte Reserve Above Plates	38 mm	

CONTAINER CONSTRUCTION	
Container	Polypropylene
Cover	Polypropylene Sealed To Container
Terminals	Universal
Handles	Plastic Mounted To Cover

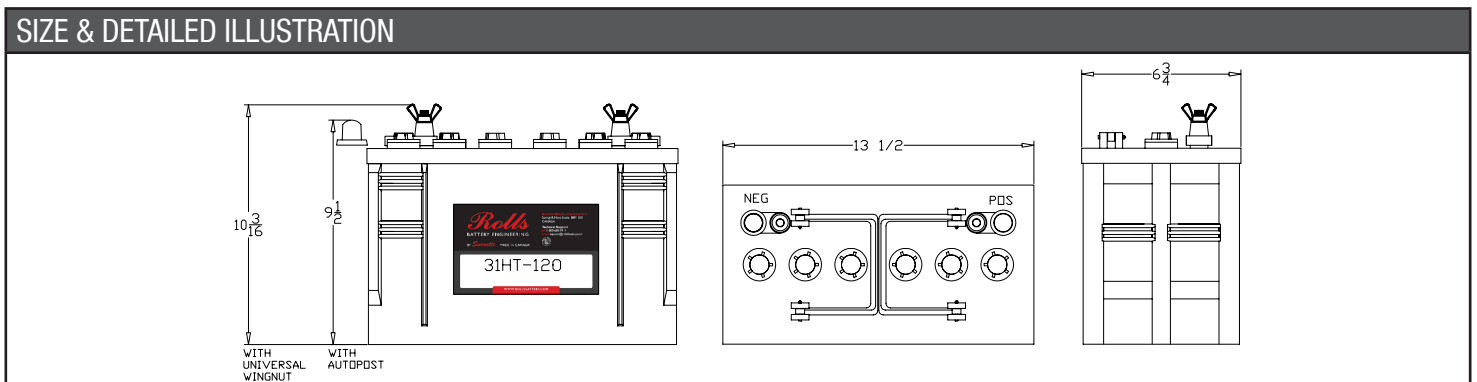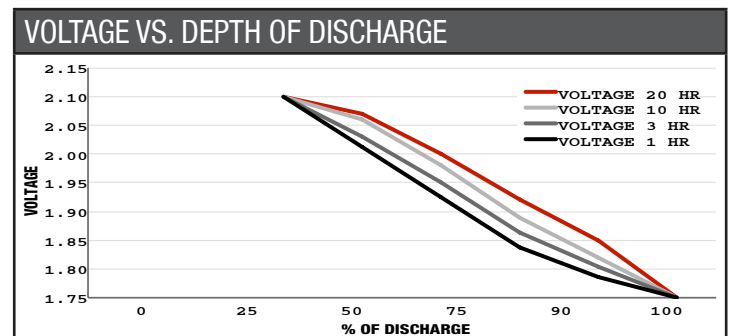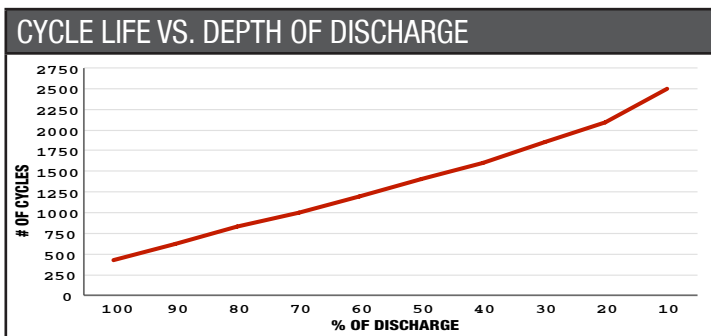

This information is generally descriptive only and is not intended to make or imply and representation, guarantee or warranty with respect to any cells and batteries. Call and battery design/specifications are subject to modifications without notice. For further information contact Rolls Battery Europe.

