



Series	VB Series LFP	Warranty	See Warranty Terms
Volts	12	Design	G49
Terminal Type	Auto Post		

Charge | Discharge

Charge Voltage Range	14.2-14.6V		
End of Discharge Protection Voltage	11.2 V		
Recommended Charge Current			
-20~10°C (-4-50°F)	0.5C	67A	

Charge Mode:

- Charge at recommend voltage & current by temperature until charge current drops to $\leq 0.05C$ (CC,CV)
- DO NOT USE TEMPERATURE COMPENSATION
- No BTS (Battery Temperature Sensor)

Max Continuous Charge Current	100 A
Max Continuous Discharge Current	100 A
Charge Temperature Range	-20~55°C (-4~131°F)
Discharge Temperature Range	-20~55°C (-4~131°F)
Storage Temperature Range	-20~55°C (-4~131°F)

Capacity

Nominal Capacity	135 AH
Total Energy	1.73 kWh
Nominal Voltage	12.8 V

Safety

- Prismatic LiFePO4 cells [CB79148102EA/3.2V135Ah]
- UL 1973(cell), UN38.3 (cell/pack)
- ROHS (cell), CE system certification, IP65 Rating

Design

- Standard-size (BCI) ABS container for easy VRLA replacement
- Fast charge/discharge performance
- Maintenance-free operation
- Heating for low temperature operation
- Bluetooth Connectivity & dedicated IOS & Android App

Battery Management System (BMS)

- Integrated hardware BMS inside
- Independent charge & discharge protection
- Short-Circuit Protection, Over-Voltage Protection, Low-Voltage Protection, Over-Current Protection, Low-Temperature Protection, Over-Temperature Protection


Specifications

Weight	14.5 kg	33.1 lbs
Length	355 mm	13.98"
Width	176 mm	6.93"
Height	190 mm	7.48"
Height Incl. Term.	190 mm	7.48"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Integrated Top Mount
Internal BMS Model	RD-RJ4S100A
Expected Cycle Life	6000 @ 80% DOD
Series Connection	4 UNITS MAX (48V)
Parallel Connection	4 UNITS MAX
Connectivity	Up to 4S4P (in 48V configuration)

Detailed Illustration

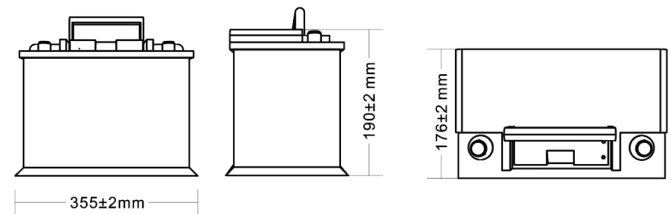

ISO9001



ISO14001



OHSAS18001

