



Series	4000	Warranty	3 Years
Volts	12	BCI	921
Cells	6	Plates/Cell	11
Terminal Type	DT		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		
Cables	Optional: 19" 4/0 interconnect cable		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current Capacity (String)	25 A
Maximum Charge Current (String)	40 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -17°C	648
Marine Crank Amps (MCA) 32°F / 0°C	810
Reserve Capacity (RC @ 25A)	406 Minutes
Reserve Capacity (RC @ 75A)	107 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>279 AH</b>	<b>2.79 A</b>
@ 72 Hour Rate	<b>265 AH</b>	<b>3.68 A</b>
@ 50 Hour Rate	<b>250 AH</b>	<b>5 A</b>
@ 20 Hour Rate	<b>210 AH</b>	<b>10.5 A</b>
@ 15 Hour Rate	<b>200 AH</b>	<b>13.3 A</b>
@ 10 Hour Rate	<b>185 AH</b>	<b>18.48 A</b>
@ 8 Hour Rate	<b>181 AH</b>	<b>22.58 A</b>
@ 5 Hour Rate	<b>166 AH</b>	<b>33.18 A</b>
@ 1 Hour Rate	<b>84 AH</b>	<b>84 A</b>

Amphere hour capacity ratings based on specific gravity of 1.280 at 25°C (77°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications




SAI GLOBAL  
ISO 9001  
Quality

Weight	52 kg	114.5 lbs
Length	39.1 cm	15.38"
Width	17.8 cm	7"
Height Inc. Term.	36.5 cm	14.38"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	51 mm	2"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Rope / Plastic Handle	

### Cycle Life vs. Depth of Discharge

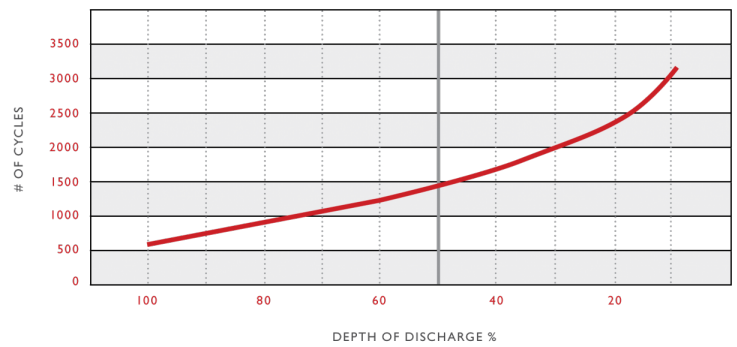

### Voltage vs. Depth of Discharge

